



BRANZ Appraised
Appraisal No. 949 [2017]

**STRATOCELL®
WHISPER™ FR
SOUND ABSORBING
FOAM**



Appraisal No. 949 [2017]

Amended 3 March 2019.

BRANZ Appraisals

Technical Assessments of
products for building and
construction.



Sealed Air (New Zealand)

24 Bancroft Crescent
Glendene,
Auckland
Tel: 09 813 9800
Web: www.SealedAir.com



BRANZ

BRANZ

1222 Moonshine Rd,
RD1, Porirua 5381
Private Bag 50 908
Porirua 5240,
New Zealand
Tel: 04 237 1170
branz.co.nz



Product

- 1.1 Stratocell® Whisper™ FR is a perforated closed cell laminated polyethylene foam panel for use as an acoustic sound absorbing overlay to interior walls and ceilings and/or as a hanging baffle in interior spaces.

Scope

- 2.1 Stratocell® Whisper™ FR has been appraised for use as an acoustic surface overlay for internal walls and ceilings and as a hanging baffle in interior spaces.

Building Regulations

New Zealand Building Code (NZBC)

- 3.1 In the opinion of BRANZ, Stratocell® Whisper™ FR, if designed, used, installed and maintained in accordance with the statements and conditions of this Appraisal, will meet or contribute to meeting the following provisions of the NZBC:

Clause B1 STRUCTURE: Performance B1.3.1, B1.3.2 and B1.3.4. Stratocell® Whisper™ FR meets these requirements for loads arising from self-weight and impact [i.e. B1.3.3 (a) and (j)]. See Paragraphs 8.1 - 8.3.

Clause B2 DURABILITY: Performance B2.3.1 (b) 15 years and B2.3.1 (c) 5 years. Stratocell® Whisper™ FR meets these requirements. See Paragraph 9.1.

Clause C3 FIRE AFFECTING AREAS BEYOND THE FIRE SOURCE: Performance C3.4(a). Stratocell® Whisper™ FR has a material Group Number of 1-S. See Paragraph 12.1.

Clause F2 HAZARDOUS BUILDING MATERIALS: Performance F2.3.1. Stratocell® Whisper™ FR meets this requirement and will not present health hazard to people.



Product Information

Description

- 4.1 Stratocell® Whisper™ FR is a closed cell laminated polyethylene foam which has cells that are subsequently opened through the manufacturing process, resulting in a sound absorbent material.
- 4.2 Stratocell® Whisper™ FR sheets measure a nominal 1200 x 2400 mm and are available in thicknesses ranging from 20 mm to 50 mm. Common variants in the New Zealand market are 25 mm and 50 mm. The density of the foam material is 25 kg/m³.
- 4.3 Stratocell® Whisper™ FR sheets are white or black in colour and are packaged in clear polyethylene wrap.
- 4.4 Accessories used with Stratocell® Whisper™ FR, which are supplied by the installer, are mechanical fasteners or adhesives.

Handling and Storage

- 5.1 Stratocell® Whisper™ FR must be stored horizontally, indoors, in a well ventilated area, away from direct sunlight, and in dry conditions.


Technical Literature

- 6.1 Refer to the Appraisal listing on the BRANZ website for details of the current Technical Literature for Stratocell® Whisper™ FR. The Technical Literature must be read in conjunction with this Appraisal. All aspects of design, use, installation and maintenance contained within the scope of this Appraisal and the Technical Literature must be followed.

Design Information

General

- 7.1 Stratocell® Whisper™ FR sheets are laminated polyethylene foam panels for use as acoustic sound absorbing overlay panels to interior walls and ceilings, or as hanging baffles. Stratocell® Whisper™ FR can be used to control problems with noise and sound in many internal environments by absorbing noise and minimising reverberation to improve the acoustic characteristics of the space. The Graph below shows the Stratocell® Whisper™ FR 25 mm and 50 mm Acoustic Performance when tested to ISO 354: 2003 [Graph 1]. Refer to Sealed Air [New Zealand] for specific design requirements.

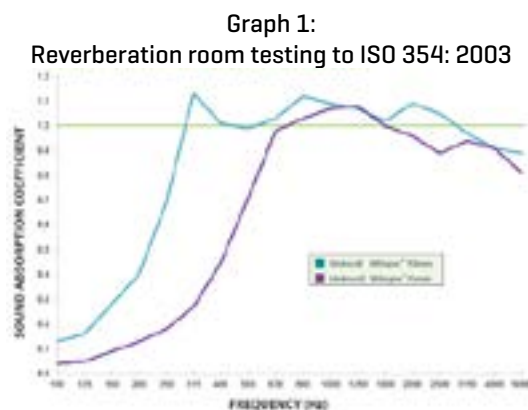

- 7.2 Stratocell® Whisper™ FR is not a vapour barrier. Designers will need to consider the need for vapour control for the supporting walls or ceiling behind the acoustic foam overlay.

Structure

- 8.1 Stratocell® Whisper™ FR panels have a mass of 1.25 kg/m² for the 50 mm thick panel and 0.625 kg/m² for the 25 mm thick panel. Sheets have a nominal density of 25 kg/m³.
- 8.2 In ceiling applications and where the substrate integrity is unknown Specific engineering design should be carried out for fixing Stratocell® Whisper™ FR panels.
- 8.3 Stratocell® Whisper™ FR surface is resistant to impact damage. The substrate behind provides the large impact support. Stratocell® Whisper™ FR surface can be damaged by sharp objects.

Durability

Serviceable Life

- 9.1 If properly maintained, Stratocell® Whisper™ FR will remain serviceable for at least 15 years provided it is maintained and not exposed to direct UV light.

Maintenance

- 10.1 Yearly inspection and repair of defects as found is required. Mild detergent solution followed by rinsing and blotting. Refer to the Technical Literature for information on cleaning.

Prevention of Fire Occurring

- 11.1 Separation or protection must be provided to Stratocell® Whisper™ FR from heat sources such as fire places, heating appliances, flues and chimneys. Part 7 of NZBC Acceptable Solutions C/AS1 to C/AS6 and NZBC Verification Method C/VM1 provide methods for separation and protection of combustible materials from heat sources.
- 11.2 Particular consideration shall be taken around luminaires. Separation or protection requirements of the luminaire from the manufacturer must be followed.

Control of Internal Fire and Smoke Spread

- 12.1 Stratocell® Whisper™ FR has been tested in accordance with ISO 9705 and has a Group Number of 1-S. Refer to Table 4.1 of NZBC Acceptable Solutions C/AS2 to C/AS6 to determine where Stratocell® Whisper™ FR may be used according to their Group Number. No applied finishes are to be used over Stratocell® Whisper™ FR. There are no internal surface finish requirements for Stratocell® Whisper™ FR when they are used in buildings with a SH Risk Group classification.

Installation Information

Installation Skill Level Requirements

- 13.1 Installation must always be carried out in accordance with the Stratocell® Whisper™ FR Technical Literature and this Appraisal.

General

- 14.1 Installation of Stratocell® Whisper™ FR must be in accordance with the Technical Literature and this Appraisal.
- 14.2 Stratocell® Whisper™ FR can be installed with suitable mechanical fasteners or adhesives. For hanging panels, corkscrew fittings can be used. A minimum of 35 mm penetration into a 50 mm sheet is recommended.
- 14.3 Sheets should be butt jointed to cover the desired surface area. A minimum of eleven fasteners per sheet should be applied or four fixings per m². These should be installed no less than 50 mm and no more than 150 mm from the edge of the sheet and evenly distributed over the area of the sheet.
- 14.4 An air gap between 10 - 50 mm behind the sheet is recommended for maximum performance, but is not required to attain the stated acoustic absorption values.

Health and Safety

- 15.1 Refer to the Technical Literature for guidance on health and safety requirements.



Basis of Appraisal

The following is a summary of the technical investigations carried out:

Tests

- 16.1 Tests have been carried out in accordance with ISO 9705. Stratocell® Whisper™ FR achieved a Group Number of 1-S.

Other Investigations

- 17.1 An assessment of the durability of Stratocell® Whisper™ FR has been made by BRANZ technical experts.
- 17.2 Stratocell® Whisper™ FR was tested to ISO 354: 2003 by Istituto Giordano, Bellaria-Igea, Italy to determine its acoustic performance.
- 17.3 Stratocell® Whisper™ FR was tested to ISO 717-1: 2007 by Istituto Giordano, Bellaria-Igea, Italy to determine its acoustic performance.
- 17.4 Stratocell® Whisper™ FR was tested to AFNOR NF EN ISO 1600-9: 2011-321 by LAPI - Laboratorio Prevenzione Incendi S.p.A, Italy, to determine its Volatile Organic Compound Emissions.
- 17.5 Stratocell® Whisper™ FR was tested to ASTM C1338: 2008 by Intertek Columbus, Ohio to determine its fungi resistance.

Quality

- 18.1 The manufacture of Stratocell® Whisper™ FR has not been examined by BRANZ. Details regarding the quality and composition of the materials used were obtained by BRANZ and found to be satisfactory. BRANZ undertakes an ongoing review of product quality on an inwards goods basis.
- 18.2 Quality of materials, components and accessories supplied by Sealed Air is the responsibility of Sealed Air.
- 18.3 The quality of installation on site of components and accessories supplied by Sealed Air is the responsibility of the installer.

Sources of Information

- ISO 354: 2003 Acoustic - Measurement of sound absorption in a reverberation room.
- ISO 9705: 2003 Fire tests - Full-scale room test for surface products
- Ministry of Business, Innovation and Employment Record of Amendments for Compliance Documents and Handbooks.
- The Building Regulations 1992.

Amendments

Amendment No. 1, dated 3 March 2019.

This Appraisal has been amended to remove references to ASTM [423 Acoustic Performance Testing].



BRANZ Appraised
Appraisal No. 949 [2017]

BRANZ Appraisal
Appraisal No. 949 [2017]
13 March 2017

STRATOCELL® WHISPER™ FR
SOUND ABSORBING FOAM



In the opinion of BRANZ, **Stratocell® Whisper™ FR Sound Absorbing Foam** is fit for purpose and will comply with the Building Code to the extent specified in this Appraisal provided it is used, designed, installed and maintained as set out in this Appraisal.

The Appraisal is issued only to **Sealed Air [New Zealand]**, and is valid until further notice, subject to the Conditions of Appraisal.

Conditions of Appraisal

1. This Appraisal:
 - a) relates only to the product as described herein;
 - b) must be read, considered and used in full together with the Technical Literature;
 - c) does not address any Legislation, Regulations, Codes or Standards, not specifically named herein;
 - d) is copyright of BRANZ.
2. **Sealed Air [New Zealand]**:
 - a) continues to have the product reviewed by BRANZ;
 - b) shall notify BRANZ of any changes in product specification or quality assurance measures prior to the product being marketed;
 - c) abides by the BRANZ Appraisals Services Terms and Conditions.
 - d) Warrants that the product and the manufacturing process for the product are maintained at or above the standards, levels and quality assessed and found satisfactory by BRANZ pursuant to BRANZ's Appraisal of the product.
3. BRANZ makes no representation or warranty as to:
 - a) the nature of individual examples of, batches of, or individual installations of the product, including methods and workmanship;
 - b) the presence or absence of any patent or similar rights subsisting in the product or any other product;
 - c) any guarantee or warranty offered by **Sealed Air [New Zealand]**.
4. Any reference in this Appraisal to any other publication shall be read as a reference to the version of the publication specified in this Appraisal.
5. BRANZ provides no certification, guarantee, indemnity or warranty, to **Sealed Air [New Zealand]** or any third party.

For BRANZ

Chelydra Percy

Chief Executive

Date of Issue:

13 March 2017